

Complete automation for perfect Italian cooking

Boil - but not too much



Over 98°, the pasta loses its starch and gluten and tends to overcook. The **Dough.O.Mat** is equipped for temperature controlled cooking. This gives both quality and practical benefits, including: less foaming during cooking and energy savings of up to 20% compared to normal boilers.


1 kg pasta per 10 litres of water



This is the ideal ratio according to the best Italian tradition. In this amount of water, the pasta cooks evenly and in less starch: well-cooked, even consistency, no adhesion.

Automatic stirring

Cooking many kilos of pasta is far from simple: the pasta clumps together, adheres to itself, breaks and does not cook evenly.



The **Dough.O.Mat** is equipped with a hydrodynamic stirrer which operates while the pasta is cooking. The pasta is stirred by a vortex of water, at adjustable speed. This has the following advantages: completely automated cooking (no need for manual intervention while the pasta is cooking), the possibility to cook any type of pasta easily without damaging it, including tagliatelle and spaghetti, and even stuffed pastas like tortellini and soft pasta like gnocchi.

Compact footprint

The **Dough.O.Mat** is available in six models, with one or two tanks. Their large capacity enables them cook from 200 to 2,400 plates of pasta an hour, in limited space, thanks to full automation and fast boiling times. Such performance is simply beyond the reach of normal saucepans.

model	capacity	portions/hour*
C40 1 tank	7 kg	200-300
C40/2 2 tanks	7+7 kg	400-600
C80 1 tank	20 kg	600-800
C80/2 2 tanks	20+20 kg	1200-1600
C150 1 tank	40 kg	1200-1600
C300 1 tank	60 kg	1800-2400

* data for short format pasta or rice, portion size 100 g of uncooked product

Automatic pasta cooker

TECHNOLOGY AT THE SERVICE OF TRADITION

In Italy, pasta is not simply a staple, but is a national specialty. Everybody knows that it must be cooked in abundant water and put in the pot when the water is boiling. But there are many secrets to a good plate of spaghetti. And very few people know them all.

For example:

- cook at a controlled temperature so as not to lose the gluten and starch;
- stir at the right speed for each type of pasta, so that it cooks evenly without sticking;
- do not raise the lid as this changes the cooking temperature.


Nilma, in the design of the **Dough.O.Mat**, took all these factors into account and the result is a pasta cooker which combines revolutionary performance with the best gastronomic traditions.

A pasta cooker which is so perfect that you can even cook notoriously difficult dishes without problems, including: rice, spaghetti, tortellini and gnocchi.

And above all, a totally automatic pasta cooker which not only brings out the best in the pasta, but also improves the kitchen environment, the quality of your work, and is labour and energy saving.

Automatic pasta cooker

TECHNICAL DRAWINGS

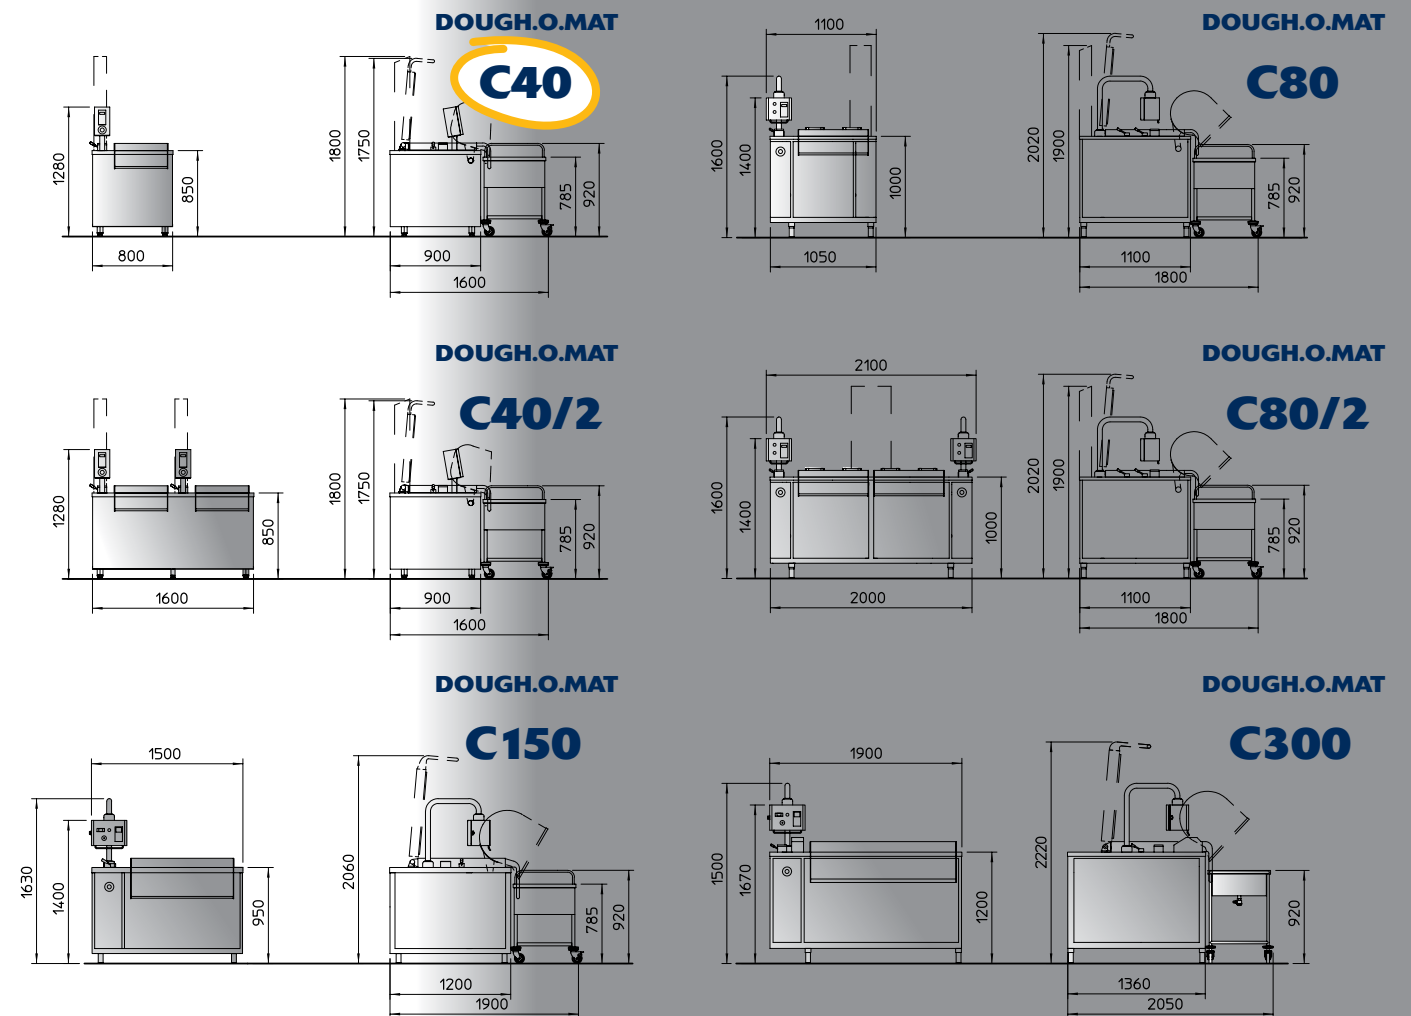

The dimensions for cookers without stirrer are unchanged.

TECHNICAL DATA	C40			C40/2			C80			C80/2			C150		C300	
	Electricity	Gas	Steam	Electricity	Gas	Steam	Electricity	Gas	Steam	Electricity	Gas	Steam	Electricity	Steam	Electricity	Steam
Tank capacity l	100			2x100			200			2 x 200			400		600	
Hot water Ø	3/4"			3/4"			3/4"			1"			1"		1 1/2"	
General drain Ø	1 1/2"			2 x 1 1/2"			2"			2 x 2"			2"		2"	
Steam Ø			3/4"			2 x 3/4"			1"			1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Pressure bar (kPa)			0,5(50)			0,5(50)			0,5(50)			0,5(50)	2(200)	2(200)	2(200)	2(200)
Steam temperature °C			110			110			110			110	133	133	133	133
Condensation drain Ø			1/2"			2 x 1/2"			1/2"			1"	1/2"	1/2"	1/2"	1/2"
Steam flow rate kg/h			50			100			80			160	150	150	260	260
Gas Ø			1"			1 1/4"			3/4"			1 1/4"				
Caloric power (lower kW) L _{23,3}			17			2 x 17			29/30			2 x 29/30				
Installed power kW	12,5	0,75	0,75	2x12,5	1,5	1,5	38	1,75	1,75	2 x 38	2x3,5	2x3,5	61,8	1,8	3,6	3,6
Electricity	3 ~ N 400 / 230 V 50Hz															
Weight kg	184	225	184	370	450	370	350	320	350	700	650	700	350	380	880	880

Nilma

LA SCIENZA DELLE GRANDI CUCINE



APPLIANCE CONSTRUCTED TO HARMONISED STANDARDS, CE MARKED

Nilma holds ISO 9001 and VISION 2000 certification

DOUGH.O.MAT

Automatic pasta cooker

The surest way to cook large quantities, with big benefits and unbeatable results



Savings: energy... and labour!

The **Dough.O.Mat** heating system (gas, electricity, steam) is automatic and temperature controlled. This perfect thermostatic control - available on all versions - combined with the machine's effective insulation, gives considerable energy savings.

Dough.O.Mat operates fully automatically, with only a few manual tasks: setting the cook time and stirring parameters, loading the pasta, adding salt and, when cooking is completed, stopping the pasta being automatically unloaded into the trolley. A single operator can handle these simple tasks, and while **Dough.O.Mat** is working, he can get on with other jobs.

The work environment? Absolutely steam free

Dough.O.Mat requires no manual operation and can thus work with the lid closed, thus preventing steam from escaping and making the kitchen more humid.



CHARACTERISTICS	CONSTRUCTION
	<ul style="list-style-type: none"> • Frame in 18/10 stainless steel tubing, on adjustable feet. • Tank and cooking baskets in AISI 316 steel, external panelling, control panel, lids and flues in AISI 304 stainless steel. • Self-balancing lid with integral handle. • Tilting basket, perforated side walls and base. • Cooking tank, insulated, with overflow device. • Finishing: all parts in contact with product are polished. External panelling, lid and flue, fine satin finish.
FUNCTIONAL SPECIFICATIONS	CHARACTERISTICS
	<ul style="list-style-type: none"> • Automatic basket tilt system controlled by electronic programmer. • Hydrodynamic stirrer with stop/continuous/alternating modes. • Indirect airgap heating system (except for gas powered versions). • Stirrer automatically switches off when the basket is tilted. • Electronic tank water level control. • Control panel mounted on mobile arm, IP55 rating. • Thermostatically controlled water temperature, calibrated to 98°C. • Automatic cycle end basket lift. • Cooking water drain device. • Safety device switches off heating power if water is lacking in the tank. • Independent basket and heating system operation (models C40/2 and C 80/2).

All models are available without stirrer on request

Integrated cooking programs

These allow busy chefs to get on with other jobs while the **Dough.O.Mat** cooks the pasta.

The programmer automatically controls the cook time and stirring modes (continuous-alternating).

On completion, the basket automatically lifts the pasta into the drain position. The chef need only unload the pasta into the trolley.

Everything under control

On request, the **Dough.O.Mat** can be connected with the "Creative Control Point Machine" software which records not only the temperature/time values, but also the ingredients, quantities and steps required to cook any recipe.

Interactive use with the chef's PC allows you to track all ingredients and log all data. The "CCPM" software also runs self-testing on the Dough.O.Mat to highlight and log any alarm conditions.



ACCESSORIES

Trolley tank in insulated double-walled 18/10 stainless steel, complete with bottom shelf and four castor wheels, two with brakes.

C40 and C40/2

Dimensions: 740x620x912 h mm
Capacity: n 2 GN 1/1 h 200

C80 and C80/2

Dimensions: 1058x620x912 h mm
Capacity: n 3 GN 1/1 h 200

C150 and C300

Dimensions: 1875x620x800 h mm
Capacity: n 5 GN 1/1 h 200



Hygiene? Total

All surfaces in contact with the cooking water are in AISI 316 stainless steel for perfect resistance to corrosion by salt. The cooking baskets and counterbaskets are polished, with rounded corners, for easy cleaning. When cooking is finished, simply run the mixing pump to stir the water with additional "Keal" detergent, and even the most inaccessible areas are effectively self-cleaning.

